



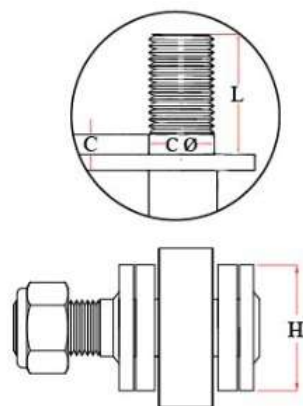

SOLID EXTENDED TYPE

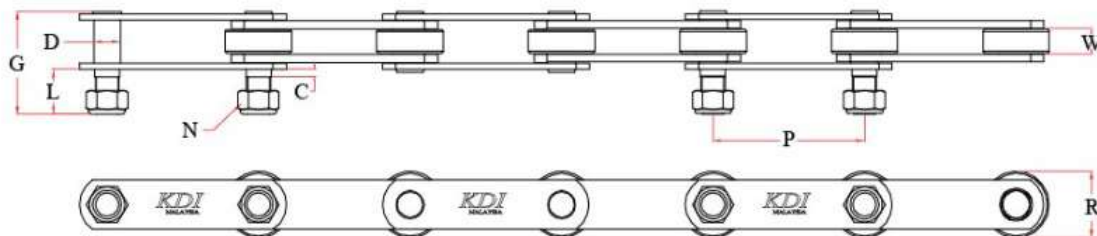

Chain No.	Pitch	Roller	Pin	Inner Width	Total Width	Pin Length	Step	Dia.	Nut	Extended Pin	Weight	Length per Conveyor
	P	R	D	W	G	L	C	cØ	N		kg/f	ft
KD44-4EP	101.6	47.6	19.0	20.2	71.2	27.0	5.0	18.0	M16	4 links	2.14	8
KD44-6EP	101.6	47.6	19.0	20.2	71.2	27.0	5.0	18.0	M16	6 links	2.12	10
KD66-4EP-WR	152.4	66.7	26.9	25.4	100.6	45.0	7.5	25.0	M24	4 links	3.60	10
KD66-6EP-WR	152.4	66.7	26.9	25.4	100.6	45.0	7.5	25.0	M24	6 links	3.53	9
KD66-EX-4EP-WR	152.4	66.7	26.9	25.4	104.4	45.0	7.5	25.0	M24	4 links	3.76	10
KD66-EX-6EP-WR	152.4	66.7	26.9	25.4	104.4	45.0	7.5	25.0	M24	6 links	3.70	9
KD66-EX-8EP-WR	152.4	66.7	26.9	25.4	104.4	45.0	7.5	25.0	M24	8 links	3.80	4
KD66-XY-4EP-WR	152.4	66.7	26.9	25.4	118.0	50.0	4.5	25.0	M24	4 links	4.43	10
KD66-XY-6EP-WR	152.4	66.7	26.9	25.4	118.0	50.0	4.5	25.0	M24	6 links	4.40	9
KD66-XY-8EP-WR	152.4	66.7	26.9	25.4	118.0	50.0	4.5	25.0	M24	8 links	4.30	4
KD5289-EP-WR	152.4	66.7	22.1	25.4	96.0	40.0	8.0	20.0	M20	every	3.72	10
KD5289-EX-EP45-WR	152.4	66.7	22.1	25.4	108.1	45.0	9.0	20.0	M20	every	4.24	10

*mm