






SOLID RIVETED TYPE

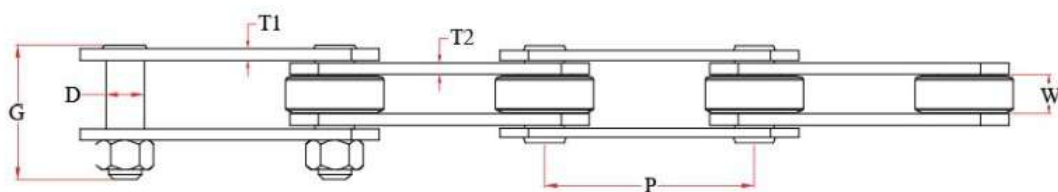

Chain No.	Pitch	Roller	Pin	Inner Width	Total Width	Plate			Breaking Load	Weight	Length per Conveyor
						Height	Thickness				
	P	R	D	W	G	H	T1	T2	Lbf	kg/f	ft
KD44	101.6	47.6	19.0	20.2	63.3	38.1	4.5	5.5	44,000	2.06	10
KD46-WR	101.6	66.7	26.9	25.4	57.0	52.8	6.0	6.0	64,000	4.00	10
KD66-WR	152.4	66.7	26.9	25.4	80.0	52.8	6.0	6.0	64,900	3.42	10
KD66-EX-WR	152.4	66.7	26.9	25.4	84.0	52.8	6.0	8.0	80,000	3.78	10
KD66-XX-WR	152.4	66.7	26.9	25.4	89.2	52.8	8.0	8.0	83,000	4.06	10
KD66-XY-WR	152.4	66.7	26.9	25.4	94.0	52.8	8.0	9.0	100,000	4.23	10
KD64	152.4	47.6	19.0	19.0	45.0	38.1	4.5	5.5	38,000	2.00	10
KD68-WR	152.4	88.9	30.0	38.1	78.0	61.0	8.0	8.0	75,000	6.70	10

*mm